

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 September 2005 (01.09.2005)

PCT

(10) International Publication Number
WO 2005/081493 A1

(51) International Patent Classification⁷: **H04L 29/06**,
29/12, H04M 7/00

TSUJIMOTO, Takahiro. **SHINTANI, Yasuyuki.**
TSUCHIDA, Shinichi.

(21) International Application Number:
PCT/JP2005/003072

(74) Agent: **NII, Hiromori**; c/o NII Patent Firm, 3rd Floor,
Shin-Osaka Suehiro Center Bldg., 11-26, Nishinakajima
3-chome, Yodogawa-ku, Osaka-shi, Osaka 5320011 (JP).

(22) International Filing Date: 18 February 2005 (18.02.2005)

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-042416 19 February 2004 (19.02.2004) JP

(71) Applicant (for all designated States except US): **MAT-
SUSHITA ELECTRIC INDUSTRIAL CO., LTD.**
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka
5718501 (JP).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **AIZU, Kazuhiro.**

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: **CONNECTED COMMUNICATION TERMINAL, CONNECTING COMMUNICATION TERMINAL, SESSION
MANAGEMENT SERVER AND TRIGGER SERVER**

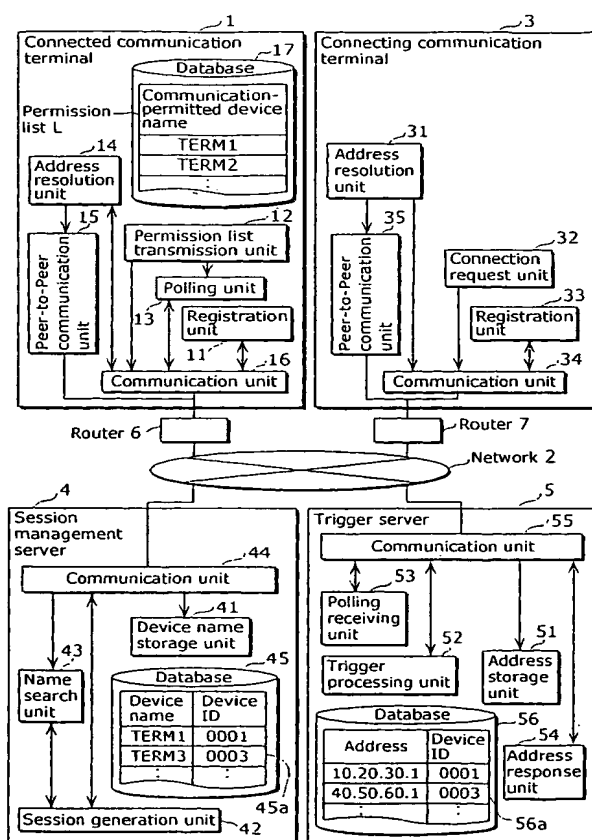

(57) Abstract: The communication system according to the present invention is made up of: a connected communication terminal (1) to which communication is requested; a connecting communication terminal (3) that requests a communication with the connected communication terminal (1); a session management server (4) that manages sessions between the communication terminals; a trigger server (5) that transmits, to the connected communication server (1), the request made by the session management server (4); and routers (6 and 7) that relay between the connecting communication terminal (3) and the connected communication terminal (1), and a network (2). In the system, the connected communication terminal (1) holds a permission list (L) that is a list of communication terminals to which connection is permitted, and the session management server (4) judges, with reference to the permission list (L), whether or not the communication between the connected communication terminal (1) and the connecting communication terminal (3) is permitted.

WO 2005/081493 A1